

GRAPHTEC

Cutting Plotter

CE5000 series

CE5000-40-CRP/60/120

Vinyl Sign
Banner
Decals
Print & Cut
Masking Film
Heat Transfer

Ease-of-use
increases
productivity.



Specifications of CE5000 series

| Item | CE5000-40-CRP | CE5000-60 | CE5000-120 |
|-------------------------------------|--|--|---|
| CPU | 32-bit CPU | | |
| Configuration | Grit rolling | | |
| Drive system | Digital servo | | |
| Maximum cutting area | 375 mm x 50 m 14.8 in x 164 ft | 603 mm x 50 m 23.7 in x 164 ft | 1213 mm x 50 m 47.8 in x 164 ft |
| Range of guaranteed precision | 356 mm x 2 m*1 14.0 in x 6.56 ft | 584 mm x 5 m*1 23.0 in x 16.4 ft | 1194 mm x 5 m*1 47.0 in x 16.4 ft |
| Compatible media widths | Minimum: 50 mm Maximum: 484 mm Minimum: 2 in , Maximum: 19.1 in | Minimum: 50 mm Maximum: 712 mm Minimum: 2 in , Maximum: 28.0 in | Minimum: 85 mm Maximum: 1346 mm Minimum: 3.3 in , Maximum: 53 in |
| Maximum media thickness | 0.25 mm | | |
| Maximum cutting speed | 60 cm/s (in all directions) 24 in/s (in all directions) | | 100 cm/s (45° direction) 40 in/s (45° direction) |
| Specifiable cutting speeds | 1-10, 15, 20, 25, 30, 35, 40, 45, 50, 55, 60 cm/s | | |
| Cutting force | 0.2-2.9N (20 gf to 300 gf) (31 levels) | | 0.2-4.4N (20 gf to 450 gf) (38 levels) |
| Minimum character size | Approximately 5 mm for alphanumeric characters (varies depending on the medium, font, etc.) | | |
| Mechanical resolution | 0.005 mm (0.0002 in) | | |
| Programmable resolution | GP-GL: 0.1/0.05/0.025/0.01 mm; HP-GLTM *2: 0.025 mm | | |
| Repeatability precision | 0.1 mm or less per 2 m*1 | | |
| No. of pens mountable | 1 pen | | |
| Compatible cutter type | Supersteel cutter blades | | |
| Compatible pen type | Water-based fiber-tip pens | | |
| Compatible cutting film | Marking film (PVC, fluorescent, or reflective film) up to 0.25 mm in thickness (excluding high-luminosity reflective film) | | |
| Interfaces | RS-232C/USB 2.0 (Full Speed) | | |
| Buffer capacity | 2 MB | | |
| Command modes | GP-GL, HP-GLTM *2(selected on the control panel) | | |
| Display panel | Liquid crystal display (16 characters x 1 row) | | |
| Rated power supply | 100 to 240 V AC, 50/60 Hz | | |
| Power consumption | 100 VA | | |
| Operating environment | 10°C to 35°C, 35% to 75% RH | | |
| Conditions for guaranteed precision | 16°C to 32°C, 35% to 70% RH | | |
| External dimensions (W x D x H)*3 | Approx. 623 x 285 x 223 mm | Approx. 851 x 585 x 1004 mm | Approx. 1,487 x 744 x 1194 mm |
| | Approx. 24.5 x 11.2 x 8.8 in | Approx. 33.5 x 23.0 x 39.5 in *3 | Approx. 58.5 x 29.3 x 47.0 in *3 |
| Weight | Approx. 9.4 kg (20.7 lbs) | Approx. 25 kg (55.1lbs) *3 | Approx. 40 kg (88.2lbs) *3 |

*1: Varies depending on the type of Graphtec-authorized film and the cutting conditions *2: HP-GLTM is a registered trademark of Hewlett-Packard Company. *3: Including the stand

Options

| Designation | Part No. | Description |
|-------------|----------|-----------------------|
| Basket | PG0022 | Basket for CE5000-60 |
| | PG0021 | Basket for CE5000-120 |

Supplies

| Designation | Part No. | Description |
|----------------------------|----------------|--|
| Cutter holder | PHP32-CB09N-HS | 1 holder for the 0.9-mm-diameter supersteel blade |
| | PHP32-CB15N-HS | 1 holder for the 1.5-mm-diameter supersteel blade |
| Cutter blade | CB09UA-5 | Set of 5 0.9-mm-diameter supersteel blades |
| | CB15U-5 | Set of 5 1.5-mm-diameter supersteel blades |
| | CB15UB-2 | Set of 2 1.5-mm-diameter supersteel blades for cutting detailed characters |
| Water-based fiber-tip pen* | KF550-F8 | 1 pen each in red, black, violet, brown, blue, green, orange, and pink |
| | KF550-S1 | 2 black pens and 1 pen each in red, blue, and green |
| | KF551-RD | 5 red pens |
| | KF552-BK | 5 black pens |
| | KF555-BL | 5 blue pens |
| | KF556-GR | 5 green pens |
| Loupe | PHP-61LOUPE | Loupe with 6x magnification |
| Carrier sheet A3 | CR09300-A3 | Carrier sheet A3 for CE5000-40-CRP |

* Other sets of water-based fiber-tip pens are also available in single colors (violet, brown, orange, or pink).

Accessories

| | | |
|---------------------------------------|--------|--|
| AC power cord | 1 | |
| USB cable | 1 | |
| User Guide CD-ROM | 1 | |
| Quick Start Manual, Usage Precautions | 1 each | |
| Cutter Plunger | 1 | |
| Cutter blade (CB09UA) | 1 | |
| Water-based fiber-tip pen | 1 | |
| Media cutter | 1 | |
| Stand | 1 | Option for CE5000-60 for some countries. Not attached for CE5000-40-CRP. |
| Roll-medium tray | 1 pair | Standard accessory for CE5000-40-CRP. Standard accessory for CE5000-60 for some countries in stead of a Stand. |
| Carrier sheet | 1 | Standard accessory for CE5000-40-CRP. |

Brand names and product names listed in this brochure are the trademarks or registered trademarks of their respective owners. Specifications are subject to change without notice.

GRAPHTEC

Graphtec Corporation

503-10 Shinano-cho, Totsuka-ku, Yokohama 244-8503, Japan

Tel : +81-45-825-6250 Fax : +81-45-825-6396

Email : webinfo@graphtec.co.jp

Website <http://www.graphteccorp.com>

CE

The low cost, high performance of the CE5000 transforms cutting jobs.

CE5000series

The low cost, high performance CE5000 Series cutting plotter offers performance comparable to high-end units at reasonable cost.

In addition to outstanding basic performance, the CE5000 incorporates a range of features such as registration mark detection to ensure high-precision cutting of printed materials.

This plotter helps increase work efficiency and productivity.

Cutting versatility for a wide range of applications



Window Display



Decals



Vinyl Sign



Print & Cut



Vehicle Sign

A wide range of features and user-friendly design for even higher cutting quality and productivity.



Standard roll media holder

A standard roll media holder ensures consistent media feeding.



Dedicated basket for long-length cutting

A dedicated basket is available* to provide peace of mind for long-length cutting.

* Optional



Control panel with icon display

Icons and buttons on the interactive LCD display are labeled for ease of use.



Handy accessory storage space

A storage space is provided for small, frequently-used items such as cutter plungers and cutting blades.

Incorporates ARMS to ensure precise cutting.

The ARMS automatic registration mark sensing function detects printing positions for high-precision cutting. The outstanding ease-of-use and performance of the ARM function increases label and sticker productivity.



Includes a range of software applications that improve work efficiency and simplify operations.


Cutting Master 2

Plotter Controller

ROBO Master Pro


4 ORIGINAL Four-point registration mark (two-axis skew) correction

Four-point registration mark sensing and X/Y-axis correction (Graphtec original two-axis skew correction) uses high-precision positioning to ensure accurate cutting of graphics that have been skewed or distorted during printing.

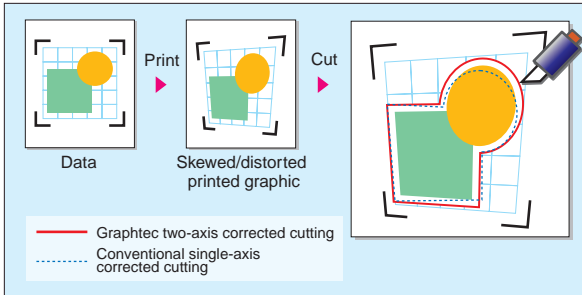


Areal ORIGINAL Segment area correction

The intermediate registration marks in the media feed direction are detected to allow four-point correction for each individual segment area. This enables high-precision positioning of the whole area of skewed prints produced using long-length printing.

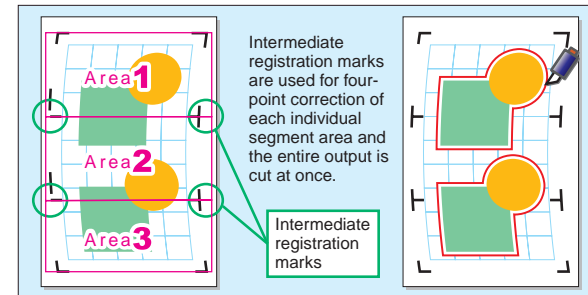


Multi Multiple registration mark correction

Layout instructions are sent together with the cutting data for designs printed using layout functions such as RIP, enabling continuous detection of registration marks for cutting. This significantly reduces work times and increases productivity.

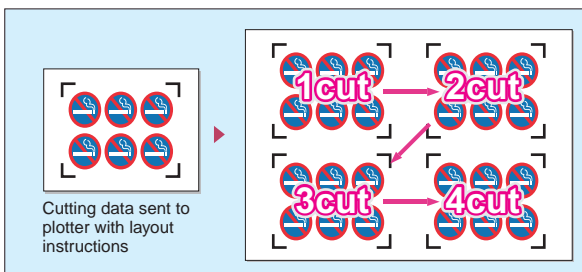

auto Patent pending Automatic registration mark detection

The first registration mark is detected automatically, eliminating the need to move the sensor to the registration mark manually. Subsequent registration marks are automatically redetected even if sensing errors occur, simplifying the process of registration mark sensing.



Supports registration mark commands

Registration mark commands are provided to control ARMS functions from a PC. Registration mark data including size and spacing can be controlled to simplify operations.

- Cutting Master 2
- ROBO Master Pro
- Plotter Controller



This plug-in application allows direct cutting from graphics applications. For higher productivity, create graphics or text in Adobe Illustrator or CorelDraw, then simply output directly to the plotter.

Main Features

- Direct output from the software
- Output by layer / color
- Possible to check the cutting lines by preview window
- Multiple over cutting is possible
- ARMS can be controlled by software
- Centering, Rotate, Mirror for easy layout
- Matrix copy for higher productivity
- Auto-welding for binding same color of shapes
- Tiling / Paneling for segmentation of cutting

| | |
|------------------|---|
| OS version | • Windows98SE, ME, 2000, XP • Mac OS X, 10.2 or later |
| Software version | • Illustrator for Windows 8,9,10,CS,CS2 • Illustrator for Mac 10, CS, CS2 • Corel DRAW 10, 11, 12, X3 |




This application allows direct control of a wide range of CE5000 functions from a PC, including cutting speed, cutting pressure, pen movement, and ARMS control. The ability to control various plotter settings from a PC dramatically improves work and operating efficiency.

Main Features

- Cutting conditions setting
- Test cut
- Position move
- Rotation
- Origin point
- Key board control
- Registration mark setting
- Auto-mark reading
- Mark size, distance

| | |
|------------|---------------------------|
| OS version | Windows98SE, ME, 2000, XP |
|------------|---------------------------|

*USB I/F only

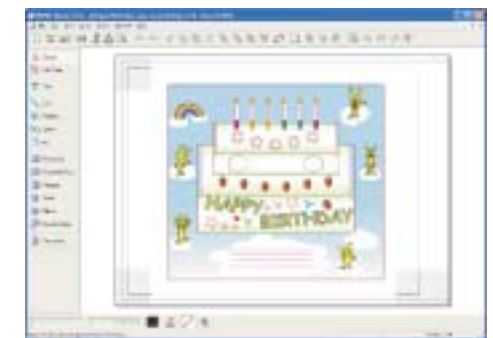

This sign creation application is simple and easy-to-use, even for first-time users. Create and edit graphics and text for simple film cutting. The application provides a function for use on stickers or labels.

Main Features

- Edit a design (Shape, True type font)
- Import the DXF files (R13 format)
- Direct output from software
- ARMS can be controlled by software



| | |
|------------|---------------------------|
| OS version | Windows98SE, ME, 2000, XP |
|------------|---------------------------|

*USB I/F only